

Technical Data Sheet

CODE 11117

MG 150/6"

In-line axial fans



Certifications



IMQ



CE



IMQ Performance



CCC



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,18	Voltage (V)	220-240
Absorbed Power max (W)	30	Weight (Kg)	0,80
Frequency (Hz)	50	Delivery max (l/s)	89
Insulation Class	II°	Delivery max (m ³ /h)	320
IP	X4	Pressure max (mmH2O)	7
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	69
Nominal Diameter (mm)	155	RPM	2200
		Sound power level Lw [dB(A)]	48

DIMENSIONS

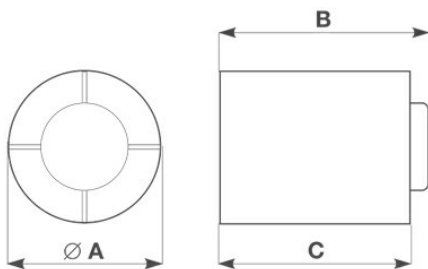

Size A (mm)	∅ 155
Size B (mm)	110
Size C (mm)	107

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11117

MG 150/6"


In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 320 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

CURVES

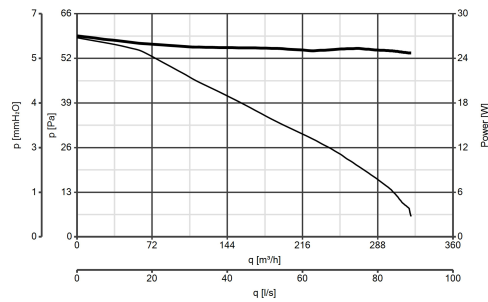

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)
Code 12966



SCNRB
SCAT.COM.NON
REV.INCASSO
Code 12971



STAFFA PER
SOTTOTETTO/SOFFITTO
D.150
Code 22261



KIT SCB
(TRAS.F.E.C.)
Code 22481

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com