

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S

Flush mounted axial fans



### Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

|  |            |                                     |         |
|--|------------|-------------------------------------|---------|
| Absorbed Current max (A)                                   | 0,19       | Voltage (V)                         | 220-240 |
| Absorbed Power max (W)                                     | 35         | Weight (Kg)                         | 3,88    |
| Frequency (Hz)   | 50/60      | Delivery max - Extract (l/s)        | 188,9   |
| Inlet  | Automatico | Delivery max - Extract (m3/h)       | 680     |
| Insulation Class   | II°        | Delivery max - Intake (l/s)         | 97,2    |
| IP   | X4         | Delivery max - Intake (m3/h)        | 350     |
| Max absorbed Power at 60Hz (W)                             | 40         | Delivery max (m³/h)                 | 680     |
| Max ambient temperature for continuous operation (°C)      | 50         | RPM                                 | 1160    |
| Max ambient temperature for continuous operation 60Hz (°C) | 50         | Rpm - Exhaust                       | 1160    |
| Nominal Diameter (mm)                                      | 262        | Rpm - Supply                        | 1260    |
| Ø Discharge Hole (mm)                                      | 335 ÷ 340  | Sound Pressure level Lp [dB (A)] 3m | 45,3    |

### DIMENSIONS

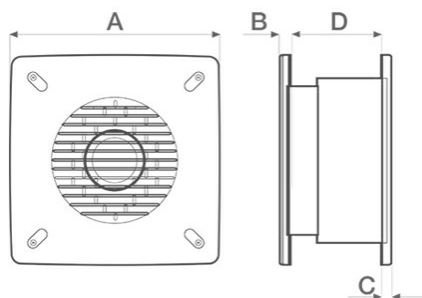

|             |         |
|-------------|---------|
| Ø wall hole | 335/340 |
| Size A (mm) | 400     |
| Size B (mm) | 10      |
| Size C (mm) | 11      |
| Size D (mm) | 180     |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S


Flush mounted axial fans



### DESCRIPTION


- Model designed for installation recessed into wall.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight)
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### ACCESSORIES



**KIT TE 230/9"**  
**(TORRETTA)**

Code 13002



**KIT SO**  
**(SOFFITTO)**

Code 13012



**KIT ML 230/9"**  
**(MURO-LARGO)**

Code 13016



**KIT TC 230/9"**  
**(TETTO CON**  
**CONDOTTO)**

Code 13028

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)